


## 60 mm x 130 mm x 46 mm FAG 2312-K-TVH-C3 + H2312 Rodamientos De Bolas Autoalineables

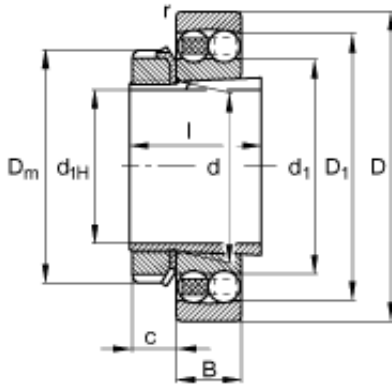

2312-K-TVH-C3 + H2312 Bearing 2D drawings and 3D CAD models

Bearing No. 2312-K-TVH-C3 + H2312

Size	55x130x46 mm
Bore Diameter	55 mm
Outer Diameter	130 mm
Width	46 mm
$d_{1H}$	55 mm
D	130 mm
B	46 mm
$B_{a \min}$	5 mm
c	13 mm
$D_1$	109,1 mm
$D_{a \max}$	118 mm
$D_m$	80 mm
d	60 mm
$d_1$	77 mm
$d_{a \max}$	72 mm
$d_{b \min}$	66 mm
l	62 mm
$r_{a \max}$	2,1 mm
	H2312 / Adapter sleeve
m	2,52 kg / Weight
$m_1$	0,49 kg / Weight, adapter sleeve
$C_r$	89000 N / Dynamic load rating (radial)
e	0,41



## FYH BEARING LTD

$Y_1$	1,55
$Y_2$	2,4
$C_{0r}$	28000 N / Static load rating (radial)
$Y_0$	1,62
$n_G$	5000 1/min / Limiting speed
$n_B$	8000 1/min / Reference speed
$C_{ur}$	1740 N / Fatigue limit load, radial